




Nokia 6102i Inside Display Screen Replacement

Written By: Danielle

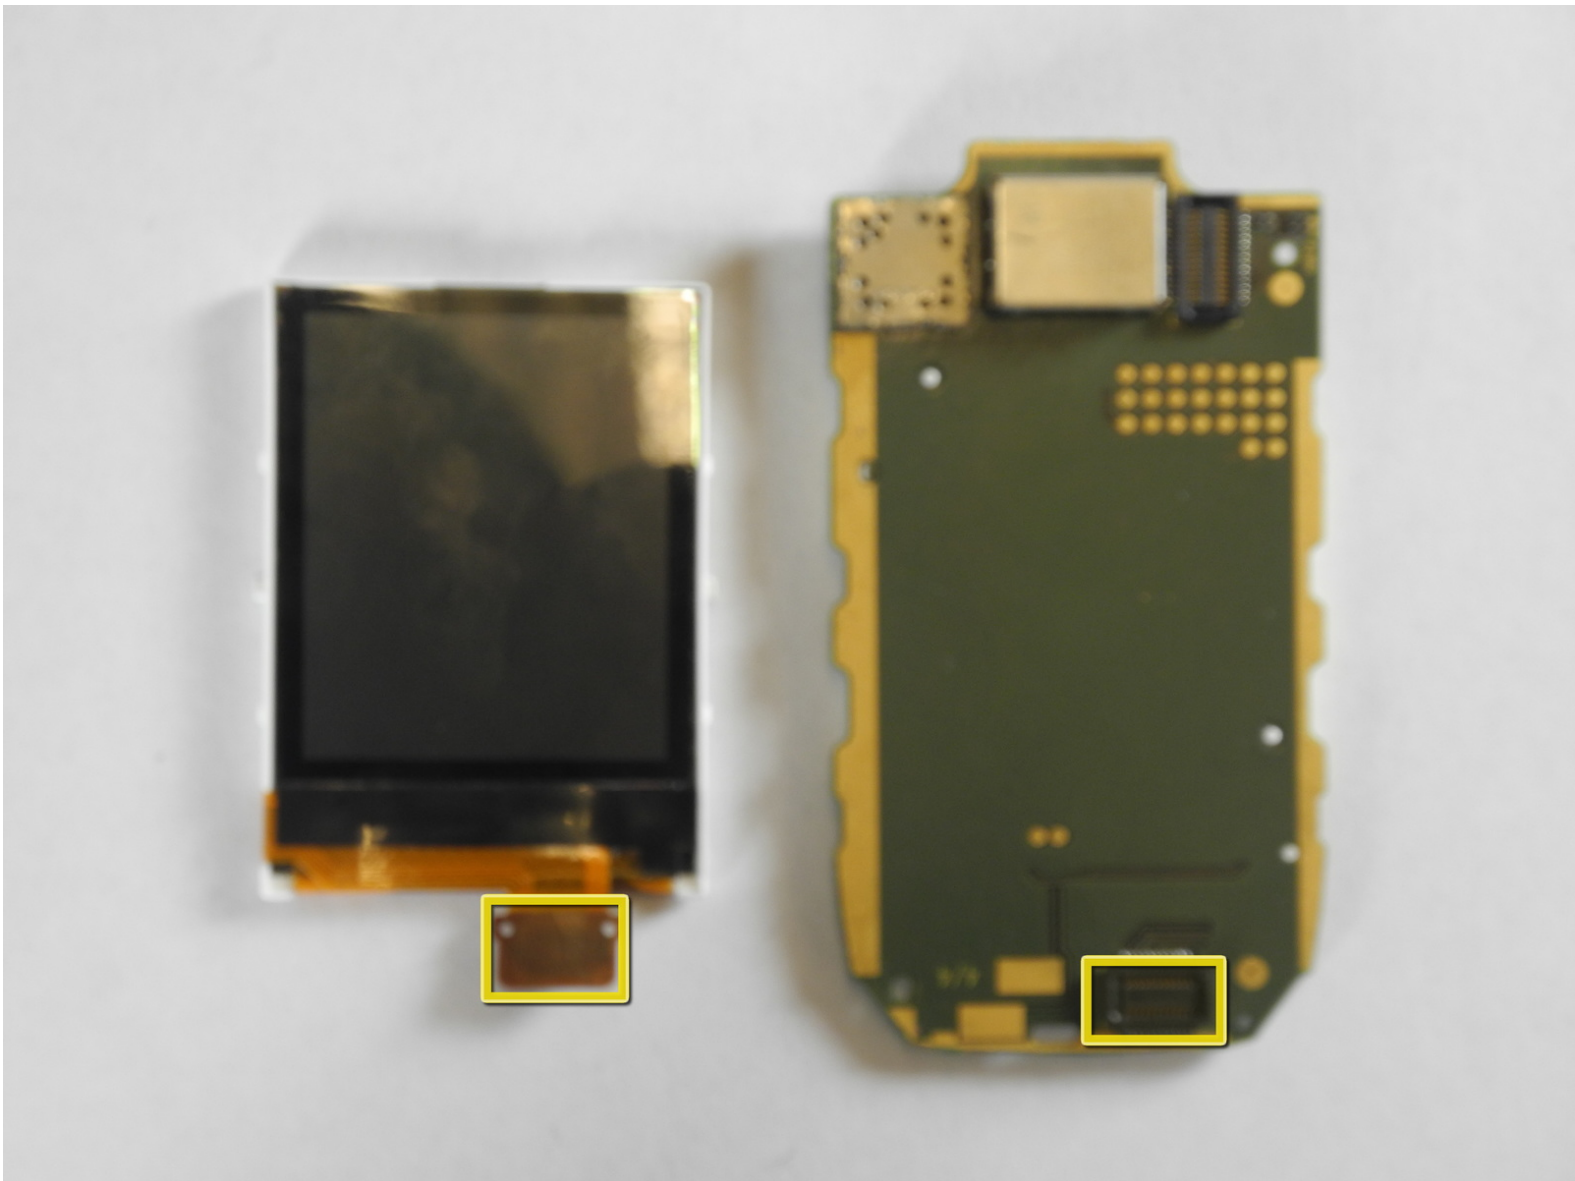

INTRODUCTION



Reassemble the Nokia 6102i




TOOLS:

- [64 Bit Driver Kit](#) (1)
-



Step 1 — Inside Display Screen

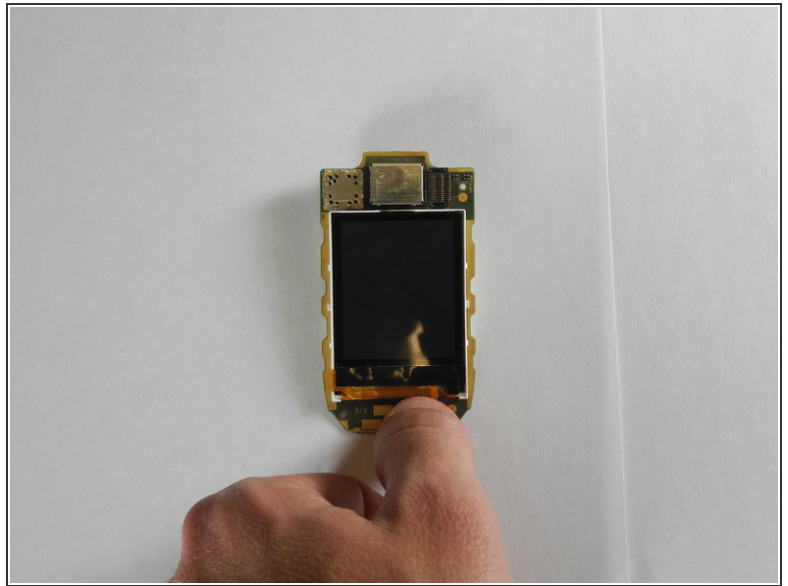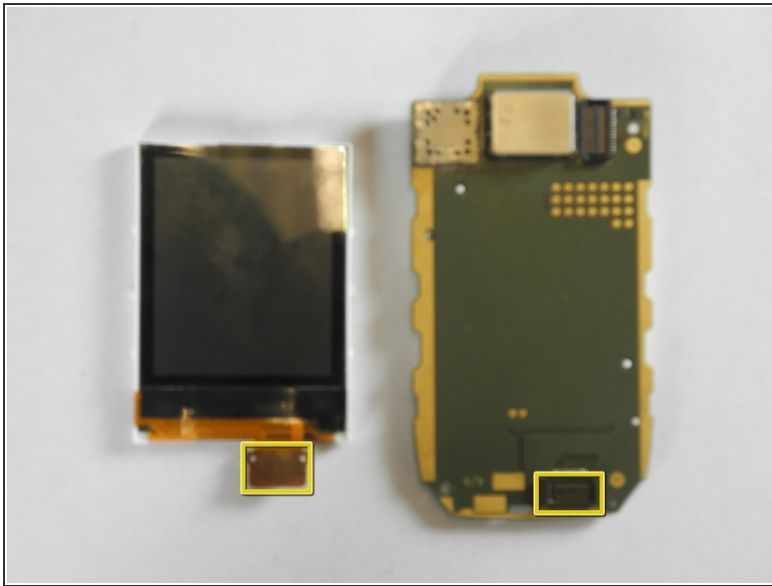

 This step does not require much force.

- With the screen facing up, connect the display connector to the smaller of the open connectors on the motherboard.

Step 2

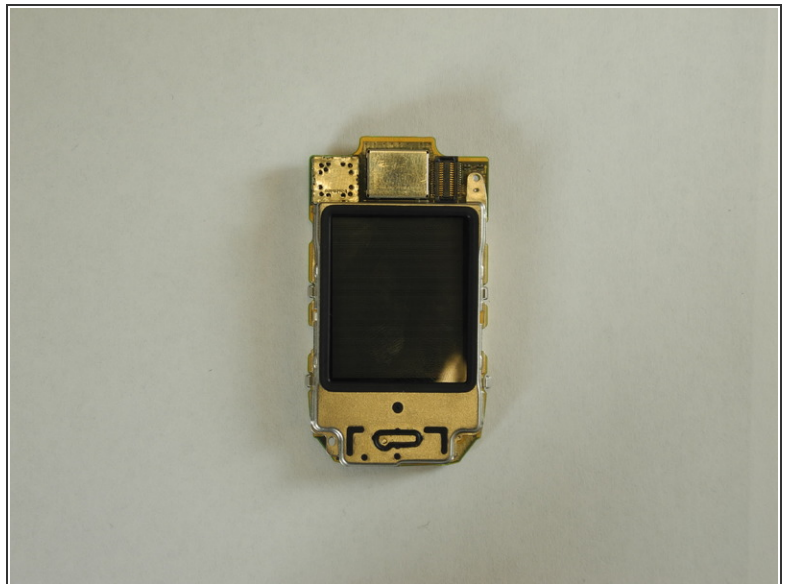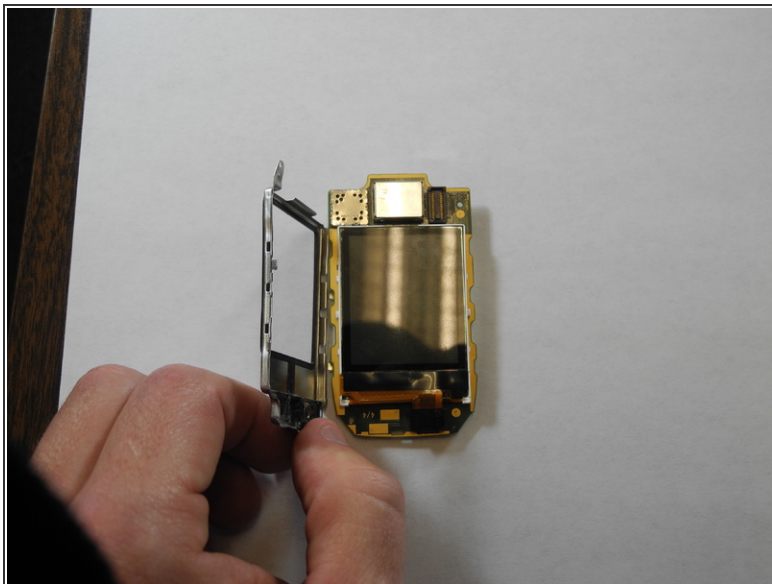


- Place the metal case over the top of the screen so that it snaps into place.

Step 3



- Insert the circuitboard into the back of the phone, with the inside screen facing down.
- Lightly press down on the left hand corner so the circuitboard attaches to the phone.

Step 4 — Cover

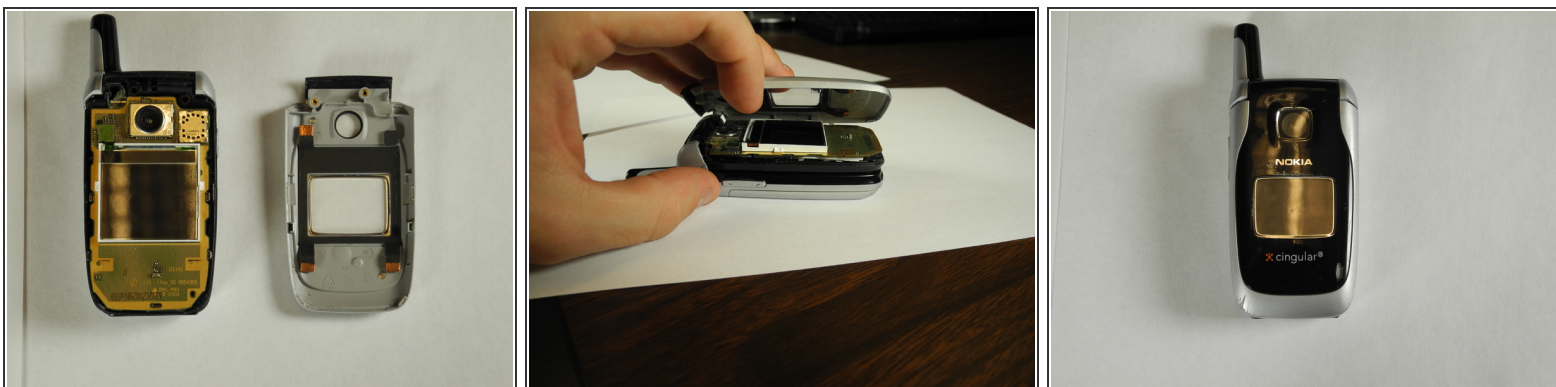

- Snap the top cover into place so that the outside screen is visible. Press around the perimeter to secure the case.

Step 5



- Open the phone and insert the screws tightly.

Step 6



- This step does not require much force.
- Snap on the black piece over the exposed screws.

